









GREAT/DIVIDER STARTER PANEL

Assembly Instructions







GREAT/DIVIDER - Starter Panel

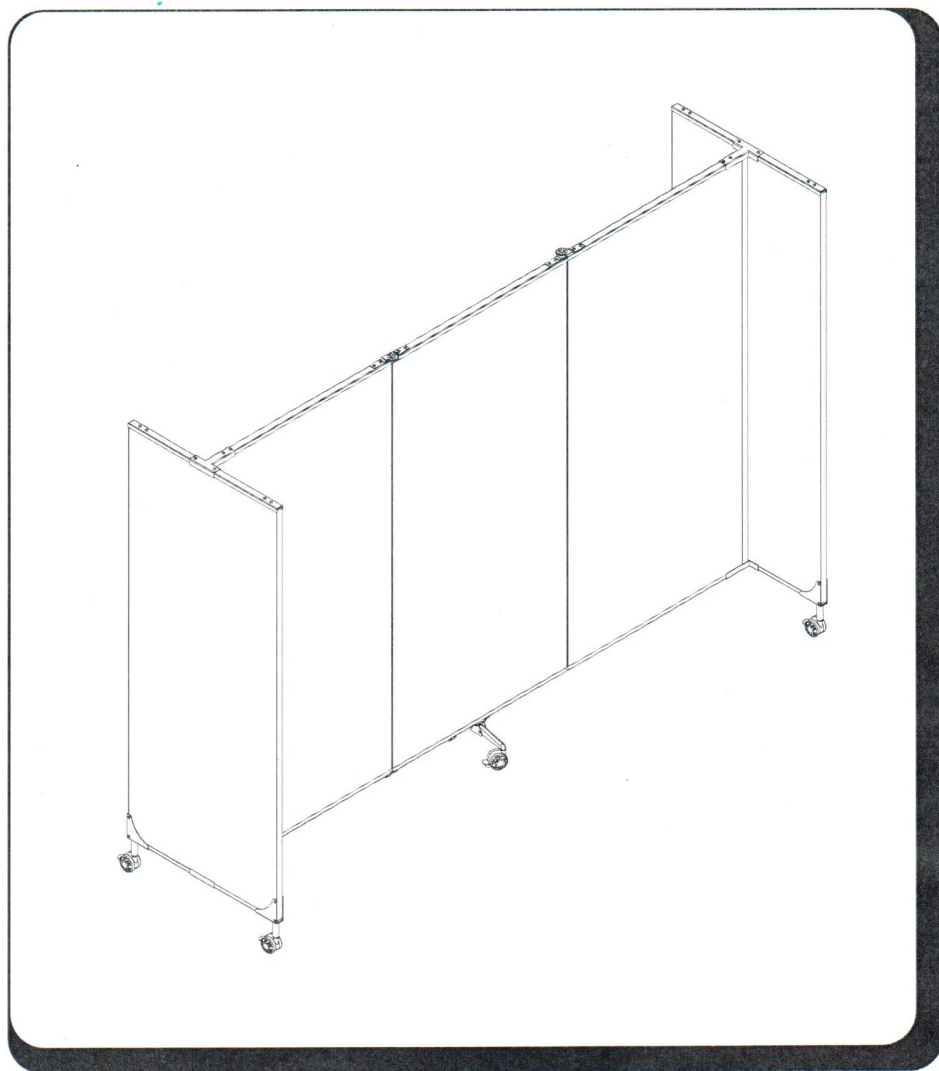

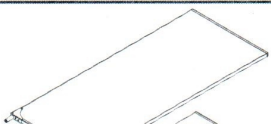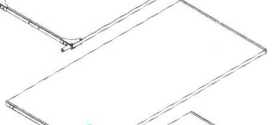Part	Drawing	Description	Qty
P-1		End Panel 27"	2 EA
P-2		Middle Panel	1 EA
P-3		Middle Panel w/Tube	2 EA
P-4		Spring Assisted Foot Assembly	1 EA
P-5		'T' Connector	4 EA
P-6		Panel Hinge	4 EA
P-7		Panel Lock (2 Screws, 2 Lock Washers, 2 Flat Washers)	2 EA

Hardware List

A		Screw M6x12mm See note on page 3	(22 EA)
B		2" Locking Caster	2 EA
C		2" Locking Caster w/stem	4 EA
D		Allen Wrench	1 EA

IMPORTANT


Do not use unless all screws are tight. At least every six months check all screws to ensure that they are correctly tightened. Continued use of the product when damaged will void further claims. Failure to follow instructions in assembly or use and/or the fitting of non-factory parts may also void further warranty claims.

READ THROUGH INSTRUCTIONS FROM BEGINNING TO END **BEFORE** STARTING TO ASSEMBLE UNIT

To Assemble:

NOTE: Some screws (A) are installed by the factory for shipping purposes and must be removed and reinstalled during the assembly process.


- 1.) Identify and separate all the parts and hardware.
- 2.) Attach 2 'T' Connectors (P-5) to the Top and bottom of the End Panel (P-1) using 4 Screws (A) as shown in illustration # 1A. Repeat this step with your second P-1 panel. Snug these screws using Allen Wrench(D). Do not tighten until you have completed Step 3.

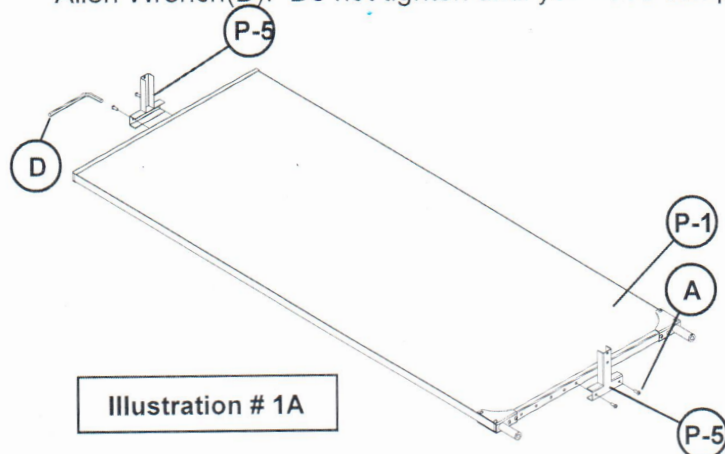

Missing Parts or Damaged Parts

For Your Convenience you can
EMAIL us at
warranty@sylexergonomics.com

- 3.) Slide the Middle Panel with Tube (P-3) in the 'T' Connectors (P-5) on the end Panel (P-1) and secure using 8 Screws (A). Tube on P-3 goes against P-1. Repeat this step with your second set of P-1 and P-2 panels.

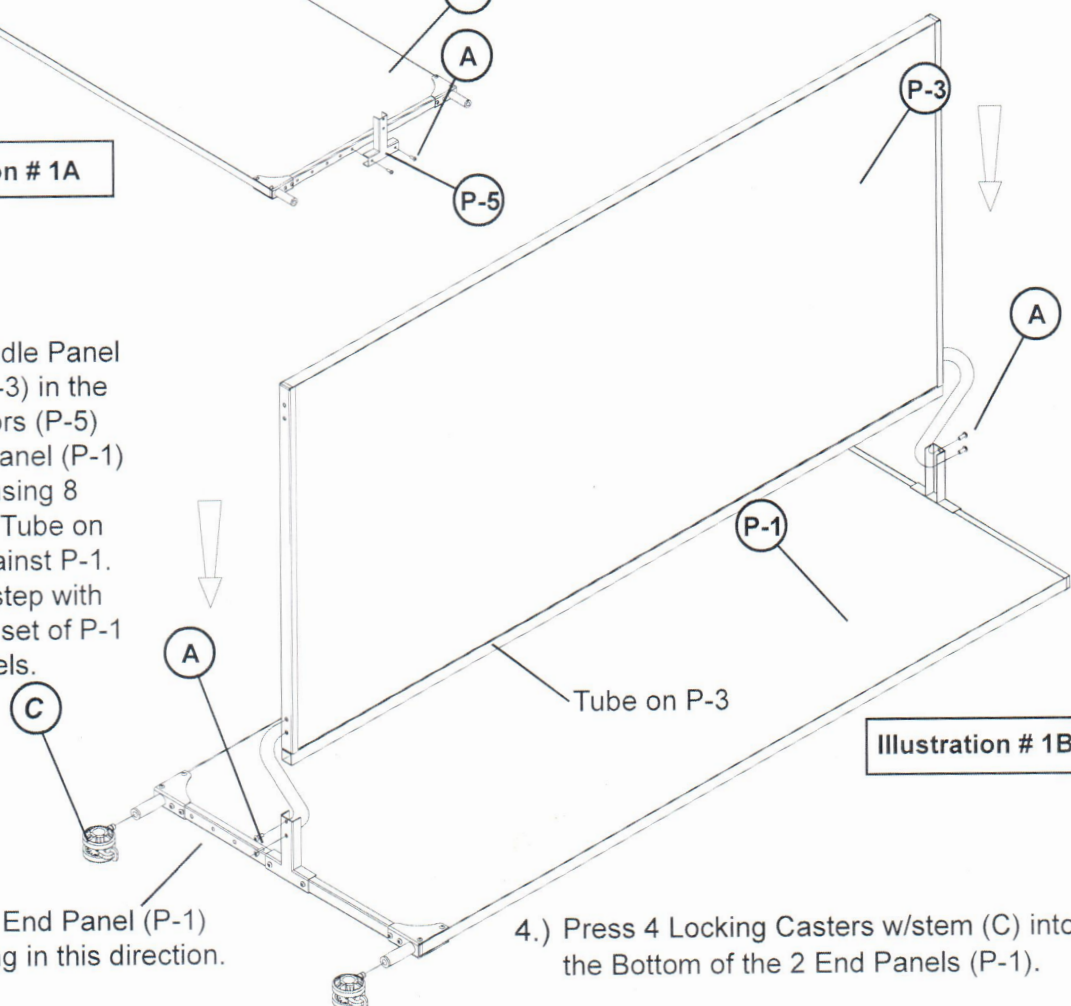



Make sure your End Panel (P-1) holes are running in this direction.

- 4.) Press 4 Locking Casters w/stem (C) into the Bottom of the 2 End Panels (P-1).

NOTE: If you are building a divider larger than the Great Divider Starter Panel unit, please refer to the Great Divider Add-On Panel assembly instructions at this point before going to Step 5.

5.) Slide middle Panel (P-2) along side Middle Panel w/Tube (P-3) as shown in illustration # 2. Be sure that holes in bottom of Panels (P-2) are aligned as shown.

6.) Attach 2 Panel Hinges (P-6) to the Top and bottom of the Middle Panel (P-2) and the Middle Panel w/Tube (P-3) using 8 Screws (A) as shown in illustration # 2.

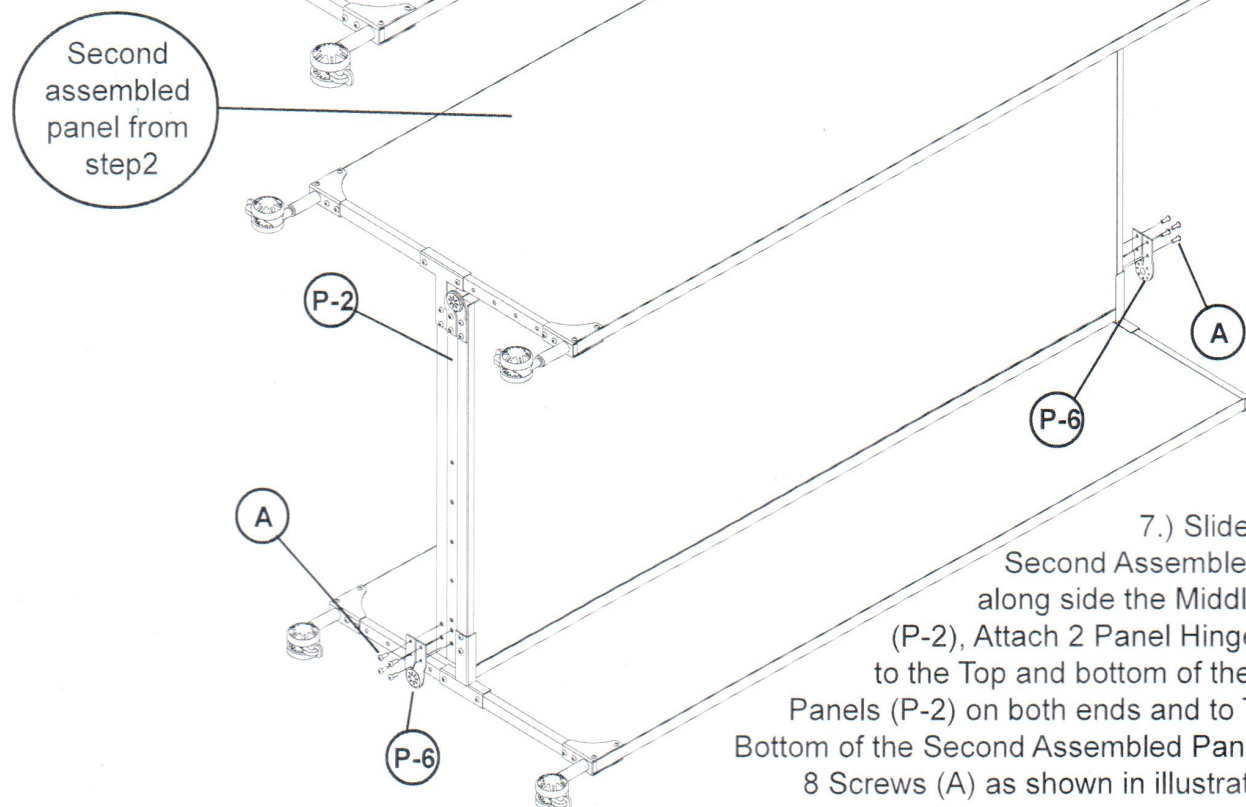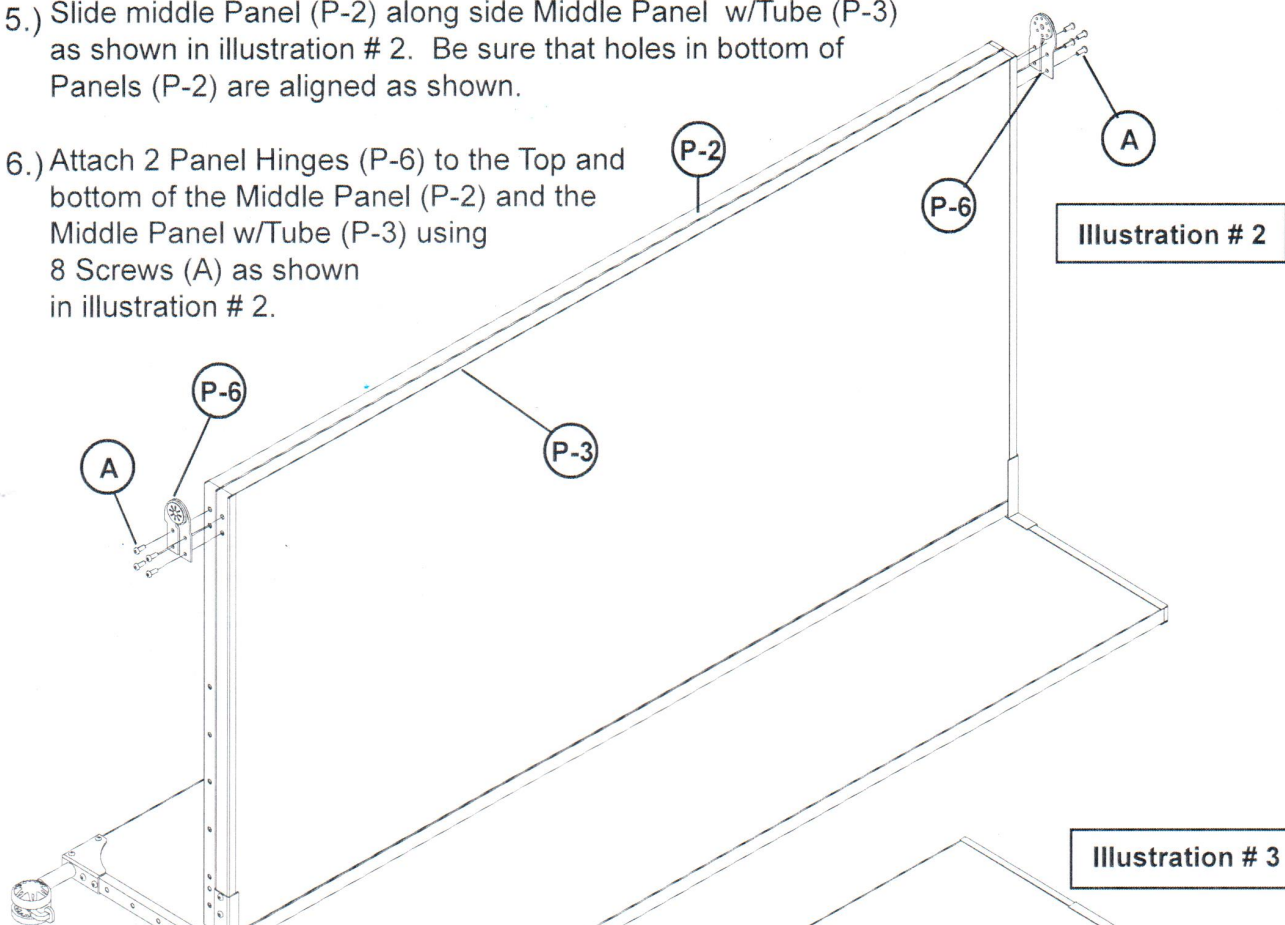

7.) Slide in your Second Assembled Panel along side the Middle Panel (P-2), Attach 2 Panel Hinges (P-6) to the Top and bottom of the Middle Panels (P-2) on both ends and to Top and Bottom of the Second Assembled Panel using 8 Screws (A) as shown in illustration # 3.

- 8.) Pull up on mounting bracket of the Foot assembly (P-4), as shown in Illustration # 4A, rotate bracket 90 degrees until it locks in to position as shown in Illustration # 4B.

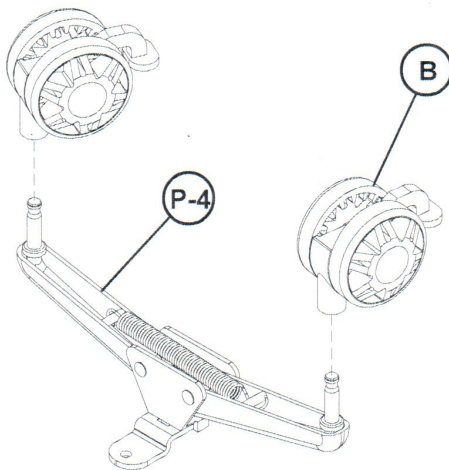


Illustration # 5

- 9.) Press 2 Locking Casters (B) onto the bottom of the Foot Assembly (P-4) as shown in illustration # 5.

- 10.) Attach 1 Foot assembly (P-4) to the bottom of the Middle Panel (P-2) using 2 screws (A) as shown in illustration # 6.

- 11.) Attach 2 Panel Locks (P-7) to the bottom of both end panels (P-1) using 2 Screws, 2 Lock Washers and 2 Flat Washers that were included in Panel Lock package as shown in Illustration #6.

Mounting Bracket

Illustration # 4A

P-4

Pull up on mounting Bracket and Turn 90 Degrees.

Illustration # 4B

Foot assembly (P-4) after rotating bracket


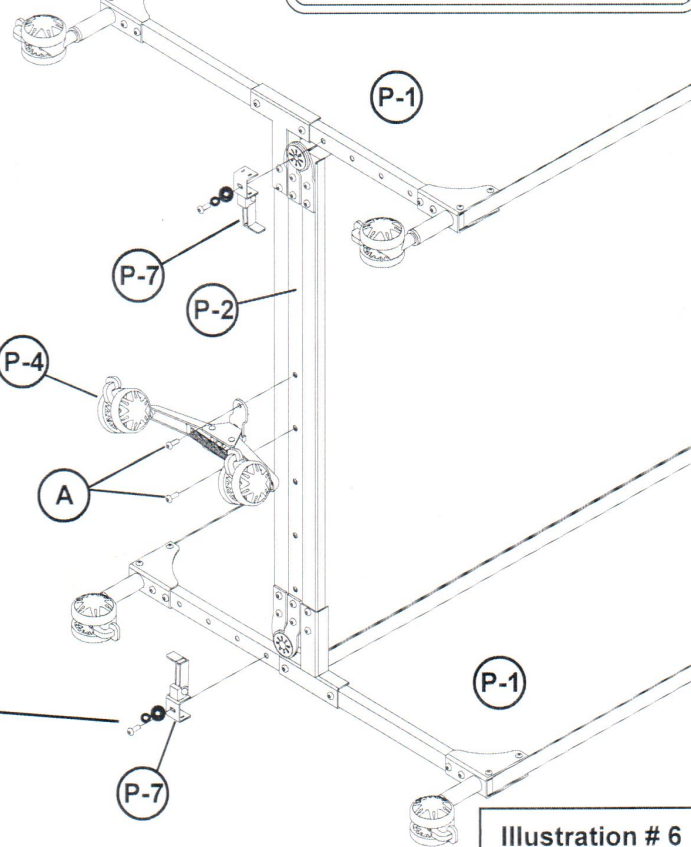


Illustration # 6

- 11.) Two people are required to lift and rotate the Great Divider to the Upright Position. Always lift the unit, completely off the Floor before Rotating. Do Not Rotate unit to upright position on 2 casters.

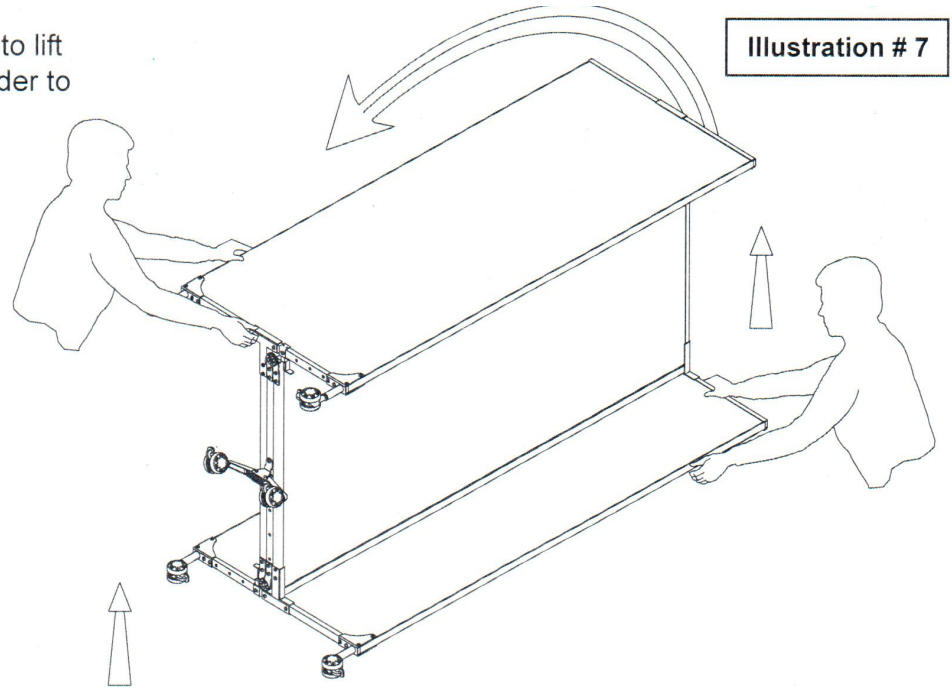

Correct Operation of Great Divider

1. To unfold panels, lock 2 casters on 1 end, unlock and fold up both panel locks and unfold from other end.

